


# PANGEA

## HD-26L Cable

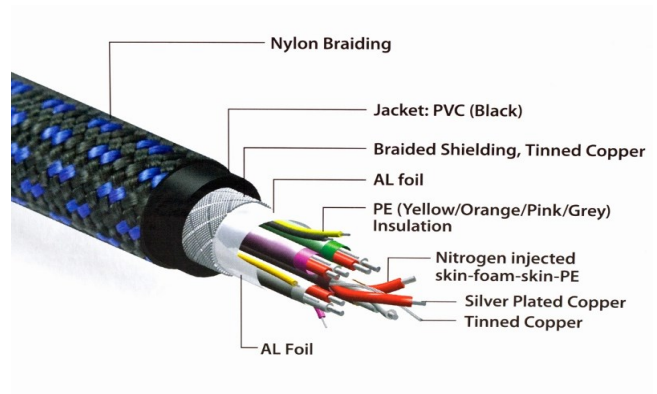

- High-Speed HDMI cable with Ethernet and audio return
- 340-MHz (10.2-Gbps) certified for HD signals up to 1080p and higher
- 26-gauge audio and video signal conductors
- Silver-plated copper conductors for superior video signal clarity and transfer
- Triple-Shielding for Maximum RF- & EMI rejection
- Advanced Nitrogen Gas-Injected dielectric conductor insulation
- Supports 10-bit, 12-bit, and 16-bit Deep Color depths
- Supports “x.v.Color”
- Incorporates automatic audio syncing (lip sync) capabilities
- Supports high-bandwidth uncompressed digital audio and all currently available compressed formats such as SACD, DVD-Audio, Dolby Digital and DTS, plus adds additional support for new lossless compressed audio formats such as Dolby TrueHD, DTS-HD Master Audio and other formats
- Ultra-wide bandwidth specification supports ‘Tru 24 fps’ and refresh rates up to 120 Hz
- Supports 192 kHz/24-bit audio signal transfer
- Fully compatible with Blu-Ray DVD player, HDTV and other high-resolution video devices
- Highly flexible conductor design
- Braided jacket covering protects cable cover from damage and cracking for extended cable life
- Two-shot custom designed molded connector body
- Flexible connector strain relief
- Gold-Plated Type-A HDMI connector with corrosion-resistant gold-plated contacts

ความยาว

ราคาตั้ง

0.5 เมตร

1,500

1.0 เมตร

1,700

1.5 เมตร

2,000

2.0 เมตร

2,300

3.0 เมตร

2,900


4.0 เมตร

3,500

หมายเหตุ : สำหรับความยาวที่มี เครื่องหมาย (\*) จะเป็นสินค้าที่แพ็คเกจพลาสติก ไม่มีกล่อง

# PANGEA

## HD-24PCE Cable

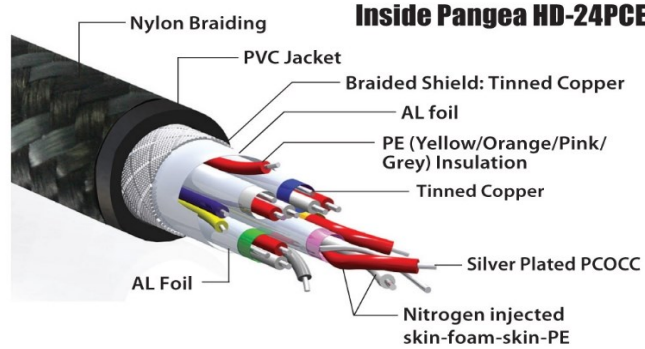

**Inside Pangea HD-24PCE**

- High-Speed HDMI cable with Ethernet and audio return
- HDMI v1.4 Audio & Video Ready
- 24-gauge audio & video signal conductors
- Audiophile-Grade PCOCC (99.99999% Pure) OHNO-cast Copper Conductors with High-Purity Silver Coating for Fantastic Video Signal Clarity & Audio Transfer
- Triple-Shielding for Maximum RF- & EMI rejection
- Advanced Nitrogen Gas-Injected dielectric wire insulation
- High-Speed HDMI, 340-MHz (10.2-Gbps) Category 2-certified for HD signals up to 1080p and higher
- Gold-Plated Type A HDMI connector with corrosion-resistant gold-plated contacts
- Two-Shot custom designed molded connector body
- Flexible connector strain relief
- Highly flexible conductor design
- Lengths under 4.0M: Braided jacket covering protects cable cover from damage, scuffing and cracking for extended cable life
- Lengths above 3.0M: PVC cover is CL-3 rated for in-wall installation
- Supports 10-bit, 12-bit & 16-bit Deep Color depths for stunning rendering of over one billion colors in unprecedented detail
- Supports "x.v.Color™" which removes current color space limitations and enables the display of any color viewable to the human eye.
- Incorporates automatic audio synching (lip sync) capabilities
- Supports high-bandwidth uncompressed digital audio and all currently available compressed formats such as SACD, DVD-Audio, Dolby Digital® and DTS®, plus adds additional support for new lossless compressed audio formats such as Dolby TrueHD, DTS-HD Master Audio™ and other formats\*
- Ultra-wide bandwidth specification supports Tru 24 fps, and 120 Hz refresh rate
- Supports 192 kHz/24-bit audio signal transfer
- Fully compatible with Blu-Ray DVD player, HDTV and other high-resolution video devices

**ความยาว**

**ราคาตั้ง**

0.6 เมตร

**2,600**

1.0 เมตร

**2,900**

1.5 เมตร

**3,500**

2.0 เมตร

**4,400**

3.0 เมตร

**5,800**

4.0 เมตร\*

**7,300**

6.0 เมตร\*

**8,700**

8.0 เมตร\*

**10,400**

10.0 เมตร\*

**14,500**


15.0 เมตร\*

**20,300**

หมายเหตุ : สำหรับความยาวที่มี เครื่องหมาย (\*) จะเป็นสินค้าที่แพ็คเกจพลาสติก ไม่มีกล่อง

# PANGEA

## HD-24PCE Cable

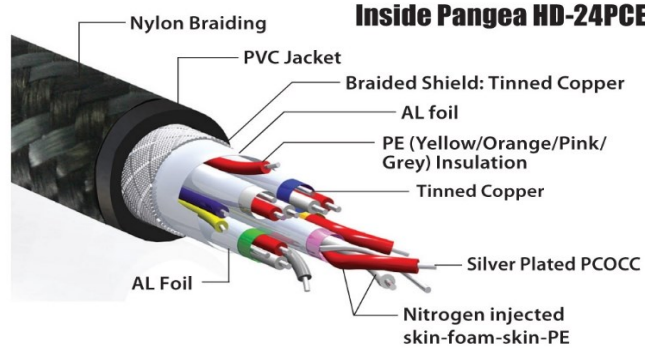

**Inside Pangea HD-24PCE**

- High-Speed HDMI cable with Ethernet and audio return
- HDMI v1.4 Audio & Video Ready
- 24-gauge audio & video signal conductors
- Audiophile-Grade PCOCC (99.99999% Pure) OHNO-cast Copper Conductors with High-Purity Silver Coating for Fantastic Video Signal Clarity & Audio Transfer
- Triple-Shielding for Maximum RF- & EMI rejection
- Advanced Nitrogen Gas-Injected dielectric wire insulation
- High-Speed HDMI, 340-MHz (10.2-Gbps) Category 2-certified for HD signals up to 1080p and higher
- Gold-Plated Type A HDMI connector with corrosion-resistant gold-plated contacts
- Two-Shot custom designed molded connector body
- Flexible connector strain relief
- Highly flexible conductor design
- Lengths under 4.0M: Braided jacket covering protects cable cover from damage, scuffing and cracking for extended cable life
- Lengths above 3.0M: PVC cover is CL-3 rated for in-wall installation
- Supports 10-bit, 12-bit & 16-bit Deep Color depths for stunning rendering of over one billion colors in unprecedented detail
- Supports "x.v.Color™" which removes current color space limitations and enables the display of any color viewable to the human eye.
- Incorporates automatic audio synching (lip sync) capabilities
- Supports high-bandwidth uncompressed digital audio and all currently available compressed formats such as SACD, DVD-Audio, Dolby Digital® and DTS®, plus adds additional support for new lossless compressed audio formats such as Dolby TrueHD, DTS-HD Master Audio™ and other formats\*
- Ultra-wide bandwidth specification supports Tru 24 fps, and 120 Hz refresh rate
- Supports 192 kHz/24-bit audio signal transfer
- Fully compatible with Blu-Ray DVD player, HDTV and other high-resolution video devices

**ความยาว**

**ราคาตั้ง**

0.6 เมตร

**2,600**

1.0 เมตร

**2,900**

1.5 เมตร

**3,500**

2.0 เมตร

**4,400**

3.0 เมตร

**5,800**

4.0 เมตร\*

**7,300**

6.0 เมตร\*

**8,700**

8.0 เมตร\*

**10,400**

10.0 เมตร\*

**14,500**

15.0 เมตร\*

**20,300**

หมายเหตุ : สำหรับความยาวที่มี เครื่องหมาย (\*) จะเป็นสินค้าที่แพ็คเกจพลาสติก ไม่มีกล่อง