





FURUTECH

Finished Analog Cable

<p>Power Reference III</p> <p>93,000.-</p>	<p>High End performance Power Cable 1.8 m</p> <ul style="list-style-type: none"> • 49-strand α (Alpha) μ-conductor • 0.32mm x 3 cores, 2.5mm diameter • Insulation: Irradiated PE (Red/Natural/Yellow) 5mm diameter • Sheath: Two layers flexible PVC (Dark Green) 15mm diameter • Shield: Special EMI- and noise-absorbent Formula GC-303 module • Jacket: Nylon yarn braid approx. 16.5mm diameter • US Connectors: IEC [FI-25 (R)] and [FI-25M (R)] • UK,/Europe/Australian Connectors: [FI-UK1363 (R)] • [FI-E35 (R)] • [FI-AU3112 (R)] 	
<p>Audio Reference III (RCA)</p> <p>87,500.-</p>	<p>High End performance Interconnect Cable 1.2 m</p> <p>30-strand α (Alpha)-OCC Conductor • 0.18mm, 1.14mm diameter</p> <ul style="list-style-type: none"> • Insulation: 30% air-foamed HDPE (Red/White) 2.60mm diameter • Cable Lay: Two twisted cores with cotton yarn • Cable Wrap: Non-woven fabric wrap ~5.8mm diameter • Shield-1: 0.12mm braided α (Alpha) Conductor • Braid density: 80% UP x 6.3mm diameter • Sheath: Two layers flexible PVC (Dark Brown) 8.0mm diameter • Shield-2: Special EMI- and noise-absorbent Formula GC-303 module • Jacket: Nylon yarn braid. ~10.5mm diameter 	
<p>Audio Reference III (XLR)</p> <p>100,000.-</p>	<p>High End performance Interconnect Cable 1.2 m</p> <ul style="list-style-type: none"> • 30-strand α (Alpha)-OCC Conductor • 0.18mm, 1.14mm diameter • Insulation: 30% air-foamed HDPE (Red/White) 2.60mm diameter • Cable Lay: Two twisted cores with cotton yarn • Cable Wrap: Non-woven fabric wrap ~5.8mm diameter • Shield-1: 0.12mm braided α (Alpha) Conductor • Braid density: 80% UP x 6.3mm diameter • Sheath: Two layers flexible PVC (Dark Brown) 8.0mm diameter • Shield-2: Special EMI- and noise-absorbent Formula GC-303 module • Jacket: Nylon yarn braid. ~10.5mm diameter 	
<p>Digital Reference III (RCA)</p> <p>62,500.-</p>	<p>High End performance Digital Cable 1.2 m</p> <ul style="list-style-type: none"> • 37-strand α (Alpha)-OCC Conductor • 0.16mm, 1.15mm diameter • Insulation-1: HDPE 1.75mm diameter • Insulation-2: Air-foamed PE, 5.5mm diameter • Shield-1: 0.12mm braided α (Alpha) Conductor braid density: 80% UP x 6.3mm diameter • Sheath: Two layers flexible PVC (Aquamarine) 8mm diameter • Shield-2: Special fiberglass and copper wire stranded braid • Jacket: Nylon yarn braid approx. 10.5mm • Shield-3: Special fiberglass and copper wire stranded braid • Connectors: RCA [FP-106 (R)] or BNC [FP-3-117 (R)] 	




FURUTECH

Finished Analog Cable


<p>Digital Reference III (XLR)</p> <p>69,200.-</p>	<p>High End performance Digital Cable 1.2 m</p> <ul style="list-style-type: none"> • 30-strand α (Alpha)-OCC Conductor • 0.18mm , 1.14mm diameter • Insulation: 30% air-foamed HDPE (Red/White) 2.60mm diameter • Cable Lay: Two twisted cores with cotton yarn • Cable Wrap: Non-woven fabric wrap approx. 5.8mm diameter • Shield-1: 0.12mm braided α (Alpha) Conductor braid density: 80% UP x 6.3mm diameter • Sheath: Two layers flexible PVC (Dark Brown) 8.0mm diameter • Shield-2: Special fiberglass and copper wire stranded braid • Jacket: Nylon yarn braid approx. 10.5mm diameter. • Shield-3: Special EMI and noise-absorbent Formula GC-303 module • Connectors: Male [FP-601 M (R)] and female [FP-602 F (R)] 	
<p>Speaker Reference III -04 BW (2 m)</p> <p>130,400.-</p> <p>Speaker Reference III -06 BW (3 m)</p> <p>155,400.-</p>	<p>High End Performance Speaker Cable</p> <ul style="list-style-type: none"> • 6 bundles of 25-strand α (Alpha)-OCC Conductor • 0.16mm for Treble, 6 bundles of 41-strand α (Alpha)-OCC Conductor • 0.16mm for Bass, • Insulation: Special grade PE (Red/White for Bass, 5.1mm diameter) (Blue/Black for Treble, 4.8mm diameter) • Cable Lay: Four cores twisted together with cotton yarn, PVC core in center • Sheath: Two layers flexible PVC (Purple/Red) 16.0\pm0.2mm diameter • Shield: Special EMI- and noise-absorbent Formula GC-303 module • Jacket: Nylon yarn braid approx. 17.0\pm0.2mm 	
<p>Speaker Reference III -04 (2 m)</p> <p>100,000.-</p> <p>Speaker Reference III -06 (3 m)</p> <p>119,300.-</p>	<p>High End Performance Speaker Cable</p> <ul style="list-style-type: none"> • 6 bundles of 20-strand α (Alpha)-OCC Conductor • 0.18mm, 2.7mm diameter • Insulation: Air-foamed Irradiated PE (Red/White) 5.1mm diameter • Cable Lay: Two twisted cores • Sheath: Two layers flexible PVC (Purple/Red) 13mm diameter • Shield: Special EMI- and noise-absorbent Formula GC-303 module • Jacket: Nylon yarn braid approx. 14.5mm • Connectors: Spade Terminal [FP-201 (R)] or Banana Connectors [FP-202 (R)] 	

FURUTECH

Finished Analog Cable



<p>Evolution Power II</p> <p>50,000.-</p>	<p>High Performance Audio Power Cable 1.8m</p> <ul style="list-style-type: none"> • 7 bundles 35-strand α (Alpha) Conductor • 0.18mm x 3 cores, 3.69mm diameter • Insulation: Polyethylene (Red/Natural/Yellow) 5.5mm diameter • Sheath (Inner): Flexible PVC (Black) 13.5mm diameter • Shield: 9 x 24-strand 0.12mm copper stranded wire braid • Sheath: Flexible PVC (Pearl Blue) Diameter: 17.5mm • Jacket: Nylon yarn braid approx. 18.5mm • Connectors • FI-11(G) IEC Connector and FI-11M(G) Power Connector or • FI-UK(G) /FI-E11(G)/FI-AU(G) Power Connectors 	
<p>Evolution II Audio (RCA)</p> <p>49,000.-</p> <p>Evolution II Audio (XLR)</p> <p>56,000.-</p>	<p>High Performance Interconnect Cable 1.2m</p> <ul style="list-style-type: none"> • α (Alpha)-OCC Conductor wires are treated with the FURUTECH α(Alpha) to minimize transmission loss. • Finished with High Performance FP-110 (G) RCA or FP-701M(G)/702F(G) XLR Connectors. • FP-110 (G) non-magnetic 24k Gold Plated PCOCC central pin with dielectric Teflon. Body made using non-magnetic 24k Gold Plated Eutectic cast Brass. Non-magnetic Brass Housing (Black). • The pin of FP-601M(R)/602F(R) is made using non-magnetic 24k Gold Plated Eutectic cast Brass with dielectric PBT. Non-magnetic Brass Housing (Black). • Shielded with 0.12 mm α(Alpha) conductor wire Braid realizing superior noise isolation. • Insulated with high quality Polypropylene which contributes to a reduction in capacitance. 	
<p>Evolution II Digital (RCA)</p> <p>29,000.-</p> <p>Evolution II Digital (XLR)</p> <p>35,000.-</p>	<p>High Performance Digital Cable 1.2m</p> <ul style="list-style-type: none"> • 37-strand α (Alpha) Conductor • 0.16mm, 1.15mm diameter • Insulation-1: HDPE 1.75mm diameter • Insulation-2: Air-foamed PE 5.5mm diameter • Shield-2: 0.12mm braided α (Alpha) Conductor ,6.3mm diameter • Jacket: Nylon yarn braid approx. 9.5mm • Connectors: FP-110(G) RCA or FP-3-117(R) BNC 	

FURUTECH

Finished Analog Cable		
<p>EvolutionII Speaker -04 (2m.)</p> <p>45,000.-</p>	<p>High Performance Speaker Cable</p> <p>* Conductor : α(Alpha) conductor (6X20 pcs／0.18 mm) ,Diameter : 2.81 mm * Insulation : Special polyethylene (Red, White) ,Diameter : 5.1 mm * Twisting : 2 Cores Twisted Together. * Sheath: Flexible PVC (Dark Green)2 Layers, Diameter : 13.5 mm * Jacket : Nylon Yarn Braid, Diameter : 14.5 mm Approx.</p> <p>α (Alpha)-μ-OFC Conductor wires are treated with the FURUTECH α(Alpha) Process to minimize transmission loss.</p>	
<p>EvolutionII Speaker -06 (3m.)</p> <p>58,500.-</p>	<p>Finished with High Performance FP-203 (G)□ spade terminals or FP-202 (G) Banana Connectors.FP-203 (G) non-magnetic□ 24k Gold Plated Pure copper plate spade terminals.</p> <p>FP-202 (G) non-magnetic□ 24k Gold Plated Eutectic cast Brass Banana Connectors.Insulated with high□ quality Polypropylene which contributes to a reduction in capacitance.</p>	



FURUTECH

Finished Analog Cable

<p>Absolute Power-15Plus-E</p> <p>26,500.-</p>	<p>High Performance Studio Power Series Improved Studio Performance with one of Furutech's largest selling cables terminated with the new FI-15 Plus series</p> <ul style="list-style-type: none"> • 3 Cores of 56 inner and 29 outer strands of α (Alpha)-OCC Conductors • Shielded with stranded-wire braid for superior noise isolation • NEMA Version: High-performance beautifully-engineered rhodium-plated IEC [FI-15 Plus(R)] and connector [FI-15M Plus(R)] o Male: Rhodium-plated nonmagnetic α (Alpha) pure copper o Female: Rhodium-plated nonmagnetic α (Alpha) pure copper • EU Version: High-performance beautifully-engineered rhodium-plated IEC [FI-15 Plus(R)] and Schuko connector [FI-E11(R)] o Male: Rhodium-plated nonmagnetic α (Alpha) phosphor bronze o Female: Rhodium-plated nonmagnetic α (Alpha) pure copper • Furutech's unique wire-clamping mechanism guarantees ultra-firm connections • Twin Flexible PVC sheaths improve vibration isolation • Insulated with high-quality polyethylene PE reducing capacitance • Overall length: 1.5M 	
<p>G-314Ag-15Plus-E</p> <p>13,500.-</p>	<p>High Performance Studio Power Series The ever popular G-314Ag cable terminated with the new FI-15 Plus series</p> <ul style="list-style-type: none"> • Silver-plated Alpha μ-OFC Conductors • Shielded with stranded-wire braid for superior noise isolation • High-performance beautifully-engineered gold-plated IEC [FI-15 Plus(G)] and connector [FI-15M Plus (G)] o Male: Gold-plated nonmagnetic α Alpha pure copper o Female: Gold-plated nonmagnetic α Alpha pure copper • High-performance beautifully-engineered gold-plated IEC [FI-15 Plus(G)] and Schuko connector [FI-E11 (G)] o Male: Gold-plated nonmagnetic α Alpha phosphor bronze o Female: Gold-plated nonmagnetic α Alpha pure copper • Furutech's unique wire-clamping mechanism guarantees ultra-firm connections • Twin Flexible PVC sheaths improve vibration isolation • Insulated with high-quality polyethylene PE reducing capacitance • Overall length: 1.5M 	



FURUTECH

Finished Analog Cable

<p>Power Ref. III (FI-E35) 91,700.-</p> <p>Power Ref. III (FI-UK) 93,000.-</p> <p>Power Ref. III (FI-AU) 92,500.-</p>	<p>High End Performance Power Cable 1.8m.</p> <ul style="list-style-type: none"> • 49-strand α (Alpha) μ-conductor • 0.32mm x 3 cores, 2.5mm diameter • Insulation: Irradiated PE (Red/Natural/Yellow) 5mm diameter • Sheath: Two layers flexible PVC (Dark Green) 15mm diameter • Shield: Special EMI- and noise-absorbent Formula GC-303 module • Jacket: Nylon yarn braid approx. 16.5mm diameter • US Connectors: IEC [FI-25 (R)] and [FI-25M (R)] • UK,/Europe/Australian Connectors: [FI-UK1363 (R)] • [FI-E35 (R)] • [FI-AU3112 (R)] 	
<p>Evolution Power II (FI-E11) 50,000.-</p> <p>Evolution Power II (FI-UK) 51,500.-</p> <p>Evolution Power II (FI-AU) 50,000.-</p>	<p>High Performance Power Cable 1.8m.</p> <ul style="list-style-type: none"> * Conductor α(Alpha) conductor (7X35 pcs/0.18 mmX3,Diameter : 3.69 mm * Insulation:Polyethylene (Red,Natural,Yellow) ,Diameter5.5 mm * Sheath(Inner): Flexible PVC (Black), Diameter : 13.5 mm * Shield:9X24 pcs/0.12 mm α(Alpha) conductor wire stranding braid * Sheath: Flexible PVC (Pearl Blue), Diameter : 17.5 mm * Jacket : Nylon Yarn Braid, Diameter : 18.5 mm Approx. <p>FI-11(G) IEC Connector and a FI-E11(G) Power Connectors</p>	


FURUTECH

Finished Analog Cable

<p>AG-12 L-DIN</p> <p>36,400.-</p>	<p>Ag-12 Pure Transmission Silver-Plated Phono Cable • DIN/RCA and Right angled DIN/RCA Ag-12-L(L-Din/RCA)</p> <ul style="list-style-type: none"> • α (Alpha) silver-plated μ-OFC Conductor • 4-layer shield construction for improved noise insulation • Main Insulation: Air-foamed polyethylene • Connectors <ul style="list-style-type: none"> o Furutech-engineered rhodium-plated DIN or L-DIN and FP-126(R) Alpha-OCC RCA connectors • The best damping and insulation materials for improved frequency extension and tonal balance • Carefully engineered cable clamp improves grip and reduces mechanical and electrically-induced distortion • Dimensions: Cable diameter ~9.5mm • Overall length: 1.2M/set 	
<p>AG-12 DIN</p> <p>34,300.</p>	<p>Ag-12-R4 Pure Transmission Phono RCA Cable</p> <ul style="list-style-type: none"> • α (Alpha) silver-plated μ-OFC Conductor o Fine OFC wire strands treated with Furutech's Alpha Cryogenic and Demagnetizing process • Three-layer shielding for improved noise insulation • Main Insulation/dielectric o Air-foamed polyethylene • Connectors o Furutech-engineered rhodium-plated FP-126(R) Alpha-OCC RCA connectors • Carefully designed cable clamp improves grip and reduces mechanical and electrically-induced distortion • Finest damping and insulation materials for improved frequency extension and tonal balance • Dimensions: Cable diameter ~9.5mm • Overall length: 1.2m/set 	

FURUTECH

Finished Analog Cable


<p>AG-16 L</p> <p>73,400.-</p> <p>AG-16</p> <p>73,400.</p> <p>AG-16-R4</p> <p>75,000.</p> <p>AG-16-XLR</p> <p>75,000.</p> <p>AG-16-L-XLR</p> <p>75,000.</p>	<p>The Ag-16 series Silver-plated α (Alpha) OCC Phono Cable</p> <p>La Grande Épreuve Grand Prix racing's single focus: Testing the absolute limits of technology and performance. Furutech builds each and every cable in their line the same way. Optimized engineering solutions applied to advanced materials and processes with utterly meticulous build quality for the ultimate test.</p> <p>Phono cartridge output is vanishingly small and easily polluted by RFI and EMI. Every element of signal transfer must be perfectly engineered to avoid distortion that robs music of life. If you're going to the trouble of playing vinyl why swamp the low-level signal in a veritable soup of noisy distortion right at its source!</p> <p>All enthusiasts are looking for the same qualities: Verisimilitude to the original event, a sense of engagement promoting suspension of disbelief, an immersion in audio and video experience. To engage without effort requires meticulous preparation of the entire playback chain especially including cables and most importantly at the signal source.</p> <p>The Ag-16 Phono Cable achieves its remarkably quiet soundstage and transparent presentation with silver-plated α OCC conductors, three-layer shielding and external ground wire, even a specially engineered cable clamp to improve grip and avoid any potential distortion.</p> <p>Ag-16 Phono Cable Features</p> <ul style="list-style-type: none"> •Silver-plated α (Alpha) OCC Conductors •Three-layer shielding for improved noise insulation •Four-way grounding and external ground wire •Insulation/Dielectric: Special-grade nitrogen injected skin-foam-skin polyethylene •Connectors: Furutech-engineered rhodium-plated Carbon and Stainless finished CF-DIN connector or L-DIN connector and CF-126(R) α (Alpha) OCC RCA connectors or CF-601M XLR connectors. •Carefully engineered cable clamp improves grip and reduces mechanical and electrically-induced distortion •Dimensions: Cable diameter approx. 8.0 mm • Overall length: 1.1M/set <p>Ag-16 Silver-plated α (Alpha) OCC Phono Cable (DIN-RCA): Ag-16-L Silver-plated α (Alpha) OCC Phono Cable (L DIN-RCA): Ag-16-R4 Silver-plated α (Alpha) OCC Phono Cable (RCA-RCA):</p> <p>XLR versions by custom order Product new attached. High resolution images on the server.</p>	
-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	--------------------------------------------------------------------------------------

FURUTECH

Furutech's new flagship Tone Arm Cable

Project V1-T(DIN-RCA)
Project V1-T-R4(RCA-RCA)

210,000.- / 1.5m

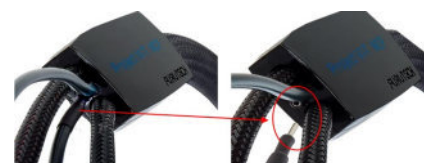

Cable shield wire can be detached as shown above




Black tube wire---connection with Turn Table and AMP Ground
Light Green tube wire--- connection with cable shield (Detachable)
Wire material: α (Alpha) OCC + Nonmagnetic Rhodium plated α (Alpha) Pure copper spade terminal

Project V1 version series connectors shown below.



Cable Construction:

High-grade dual color damping polypropylene braid inner lay and double lay audio grade nylon outer sleeve
Audio grade Sheath Incorporating damping carbon particles (RoHS)
Shield-3
Shield-2
Shield-1
Audio grade Nitrogen injected skin-foam-skin PE Insulation (Blue/Orange/Green/Red)
Silver Hybrid α (Alpha) OCC Conductors-1
Audio grade SR-PVC Insulation (Red/White)
Silver Hybrid α (Alpha) OCC Conductors-2
Grounding conductor wire

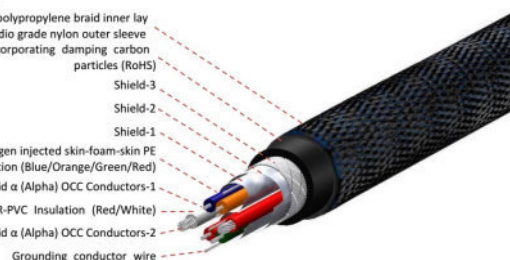

Project V1-T

Furutech's Top-of-the-line High End Performance NCF Silver Hybrid OCC Tone Arm (Phono) Cable with detachable shield. Featuring NCF & special forged carbon fiber composite materials.

NCF: Nano Crystal² Formula

Incorporated into selected Furutech products, NCF features a special crystalline material that has two 'active' properties. First, it generates negative ions that eliminate static. Second, it converts thermal energy into far infrared. Furutech combines this remarkable material with nano-sized ceramic particles and carbon powder for their additional 'piezoelectric effect' damping properties. The resulting Nano Crystal² Formula is the ultimate electrical and mechanical damping material. Created by Furutech, it is found exclusively in Furutech products.

La Grande Épreuve

Grand Prix racing's single focus: Testing the absolute limits of technology and performance. Furutech builds each and every cable in their line the same way. Optimized engineering solutions applied to advanced materials and processes with utterly meticulous build quality for the ultimate test.

Phono cartridge output is vanishingly small and easily polluted by RFI and EMI. Every element of signal transfer must be perfectly engineered to avoid distortion that robs music of life. If you're going to the trouble of playing vinyl why swamp the low-level signal in a veritable soup of noisy distortion right at its source!

All enthusiasts are looking for the same qualities: Verisimilitude to the original event, a sense of engagement promoting suspension of disbelief, an immersion in audio and video experience. To engage without effort requires meticulous preparation of the entire playback chain especially including cables and most importantly at the signal source.

The Project V1-T series Tone Arm (Phono) Cable achieves its remarkably quiet soundstage and transparent presentation with α silver hybrid OCC conductor, four-layer shielding and external ground wire, even a specially engineered cable clamp to improve grip and avoid any potential distortion.

The Project V1-T Tone Arm (Phono) Cable Features

- α (Alpha) Silver Hybrid OCC Conductors
- Three-layer shielding for improved noise insulation.
- Four-way grounding and external ground wire
- Insulation/Dielectric: Audio grade SR-PVC and Nitrogen injected skin-foam-skin polyethylene
- Connectors: Furutech-engineered rhodium-plated Carbon and Stainless finished CF-DIN NCF-P connector or L-DIN connector and CF-102 NCF(R)-P α (Alpha) OCC RCA connectors or CF-601M NCF(R)-P XLR connectors.
- Carefully engineered cable clamp improves grip and reduces mechanical and electrically induced distortion

FURUTECH

High Performance Analog Component Power Cord

The Empire
Pro Audio Power Cable

SPECIFICATIONS

Amazing Features

- Fitted with Gold-plated Furutech FI-11M (G) or FI-E11(G) and FI-11(G) IEC connector
- α (Alpha) conductor shield for protection against radiated noise
- RoHS-compliant Audio grade flexible PVC sheath improves vibration isolation
- Special Audio grade flexible PVC Insulation contributes to reduced capacitance
- Floating Field Damper™ (Earth/Ground Jumper System) with US Patent No.: 6,669,491/ European Patent (EP1445837)

Cable Specifications

- Conductors: 45-strand PC Triple C 0.32mm x 3 cores
- Insulation: Audio grade Flexible PVC (Brown, Light Blue, Green with Yellow striping) OD: 5.0mm diameter approx.
- Inner Sheath: Audio grade Flexible PVC (Black)
- Shielding: 0.12mm OFC Wire Braid
- Sheath: RoHS-compliant Audio grade flexible PVC (Dark Green), 16.0mm diameter approx.
- Outer Sleeve: Nylon yarn braid
- Length: 150cm approx.



The Empire

28,800.-

The Astoria
Pro Audio Power Cable

SPECIFICATIONS

Amazing Features

- Fitted with Non-plated Furutech FI-11M(Cu) or FI-E11(Cu) and FI-11(Cu) IEC connectors
- α (Alpha) conductor shield for protection against radiated noise
- RoHS-compliant Audio grade flexible PVC sheath improves vibration isolation
- Special Audio grade flexible PVC Insulation contributes to reduced capacitance
- Floating Field Damper™ US Patent No.: 6,669,491/ European Patent (EP1445837)

Cable Specifications

- Conductors: 80-strand PC Triple C 0.18mm x 3 cores
- Insulation: Audio grade Flexible PVC (Brown, Light Blue, Green with Yellow striping) OD: 3.5mm diameter approx.
- Inner Sheath: Audio grade Flexible PVC (Black)
- Shielding: 0.12mm OFC Wire Braid
- Sheath: RoHS-compliant Audio grade flexible PVC (Dark Green), 12.8mm diameter approx.
- Outer Sleeve: Nylon yarn braid
- Length: 150cm approx.



The Astoria

18,200.-

FURUTECH

High Performance Analog Component Power Cord

Amazing Features

- Fitted with a gold-plated Furutech FI-11M(G) AC connector (The Roxy-E with FI-E11(G)) and a FI-C15(G) IEC connector
- RoHS-compliant audio grade flexible PVC sheath improves vibration isolation
- Special audio grade polyethylene Insulation contributes to reduced capacitance
- Floating Field Damper™ US Patent No.: 6,669,491/ European Patent (EP1445837)

Cable Specifications

- Conductors: 37-strand Silver plated-OFC 0.26mm x 2 cores / 37-strand α-OFC 0.26mm x 1 core
- Insulation: Audio grade Polyethylene (Red, Yellow, Green) OD: 3.5mm diameter approx.
- Inner Filler: Cotton
- Barrier Layer: Paper Tape Wrap
- Sheath: RoHS-compliant Audio grade flexible PVC (Dark Red), 10.0mm diameter approx.
- Outer Sleeve: Nylon yarn braid (Black), 10.8mm diameter approx.
- Length: 150cm approx.



Roxy

20,500.-

Amazing Features

- Fitted with a Non-plated Furutech FI-15ME(Cu) AC connector (The Odeon-E with FI-E11Cu) and a FI-C15(Cu) IEC connector
- RoHS-compliant audio grade flexible PVC sheath improves vibration isolation
- Special audio grade polyethylene Insulation contributes to reduced capacitance
- Floating Field Damper™ US Patent No.: 6,669,491/ European Patent (EP1445837)

Cable Specifications

- Conductors: 37-strand Silver plated-OFC 0.26mm x 2 cores / 37-strand α-OFC 0.26mm x 1 core
- Insulation: Audio grade Polyethylene (Red, Yellow, Green) OD: 3.5mm diameter approx.
- Inner Filler: Cotton
- Barrier Layer: Paper Tape Wrap
- Sheath: RoHS-compliant Audio grade flexible PVC (Dark Red), 10.0mm diameter approx.
- Outer Sleeve: Nylon yarn braid (Black), 10.8mm diameter approx.
- Length: 180cm approx.



Odeon

16,700.-

FURUTECH

High Performance Analog Component Power Cord

Project V1

Furutech's new flagship power cord

440,000.- / 1.8m



Project V1

Alpha OCC-DUCC / Silver-Coated α (Alpha) OCC Conductors
Featuring NCF & Special forged carbon fiber composite Materials
Furutech's Top-of-the-line High Performance Power Cord

Project-V1 US (NEMA male)

Project-V1 EU (Schuko male)

FEATURES

The Project-V1 is Furutech's new flagship power cord and is the culmination of 30 plus years investigation by Furutech into all aspects of power and signal transmission for high end audio applications. The Project-V1 features Furutech's ground-breaking technologies, patented designs, and the absolute highest quality materials, including:

- Furutech's special antistatic and antiresonance NCF material (Nano Crystal² Formula).
- Piezo "active" materials to mechanically and electrically damp as they "interconvert" resonance into thermal release.
- Alpha Process (Deep Cyro and Demagnetizing treatment of metal parts).
- Carbon particle damping materials.
- Floating Field Damper mechanism shunting electrical potentials to ground
- Alpha OCC Mono Crystal Conductors.
- Alpha DUCC Ultra Crystallized High Purity Copper.

Furutech's beautifully crafted Project V1 power cord is an engineering marvel and the culmination of over 30 years research and design into the pure transmission of AC power. The Project V1 power cord incorporates Furutech revolutionary NCF antistatic and antiresonance material and a 3 concentric layer combination of Silver coated Alpha-OCC conductors and Alpha-DUCC conductors, a refined balanced mix of two of the best conductors Furutech has found for high end performance sound reproduction. Along with the highest-grade materials, the double shielded, double insulated Project V1 also utilizes a special hybrid polyethylene insulation that incorporates a ceramic-carbon powder damping material for ultimate power transmission cable.

The Project V1 results are extremely fine resolution down and through the very low noise floor, improved sound staging and image palpability, a musical, attractive, midrange, tight and controlled bass, plus power and dynamics to spare.

Specially designed Sleeve: Designed to limit resonance and stress on the cable while remaining flexible, the special sleeve features high-grade soft damping polypropylene and cross weaved hard fiber. (0.02mm soft polypropylene / 0.25mm hard polypropylene)

D.U.C.C. (Dia Ultra Crystallized Copper)

α (Alpha) OCC –DUCC is constructed using a combination of DUCC Ultra Crystallized High Purity Copper and Furutech's world famous Pure Transmission α (Alpha)-OCC.

Furutech DUCC Ultra Crystallized High Purity Copper -- supplied and regulated with strict quality and supply control by Mitsubishi Materials Industries -- is one of the best conductors Furutech engineers have found for signal transmission.

Mitsubishi process this extremely pure oxygen-free copper with new technology that optimally aligns the crystals while reducing the number of crystal-grain boundaries resulting in a tremendously efficient conductor. Furutech combines DUCC with Furutech's world famous Pure Transmission α -OCC and treats this optimized dual conductor configuration with Furutech's Alpha Super Cryogenic and Demagnetizing process to take purity and conductivity a significant step further.

SPECIFICATIONS

- Multi-material Hybrid conductor with special 3 tier concentric design
- Sound enhancing, resonance damping double insulation, double shielded, 3 sheath design
- Dual insulation : Inner FEP (Fluoropolymer) & Outer high-grade polyethylene
- RoHS complaint Nano-ceramic and carbon powder damping material
- cable outer diameter: 32.0mm
- Length : 1.8M Approx.

FURUTECH

Furutech's new flagship Interconnect Cable



RCA 340,000.-/ 1.2m



XLR 350,000.-/1.2m

Project V1-L

RATING

Alpha OCC-DUCC / Silver-Coated α (Alpha) OCC Conductors

Featuring NCF & Refined carbon fiber composite materials crafted through a specialized forging process.

Project V1-L-XLR (1.2M Pair)

Project V1-L-RCA (1.2M Pair)


SPECIFICATIONS

Specially designed Sleeve:



Designed to limit resonance and stress on the cable while remaining flexible, the special sleeve features high-grade soft damping polypropylene and cross weaved hard fiber. (0.02mm soft polypropylene / 0.2mm hard polypropylene)




Balanced Interconnect Cable Cable construction image

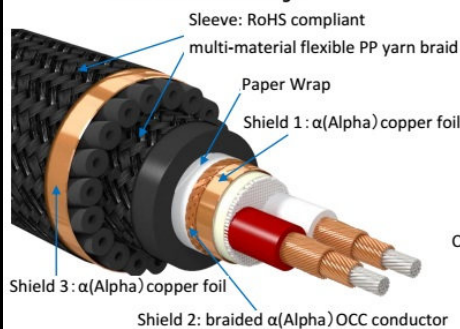

Conductor material explanation

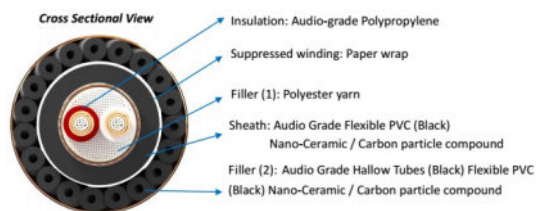


Enlarged conductor strand direction image

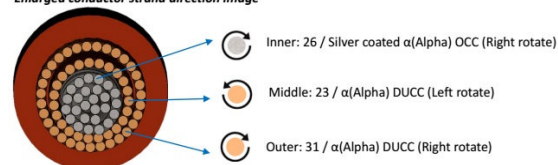

Project V1-L version series connectors shown below.



Project V1-L version Multilayer Housing Design

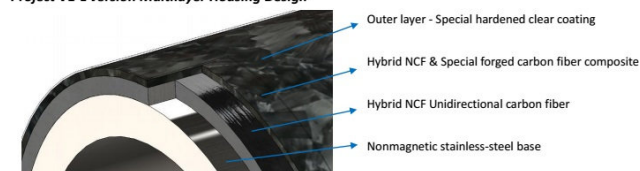

※Special feature:

Carefully engineered cable damping ring improves grip and reduces mechanical and electrically induced distortion.



- Multi-material Hybrid conductor with special 3 tier concentric design.
- Specially designed Sleeve.
- Sound enhancing, resonance damping, double sleeve, 3 shield design.
- Insulation : Audio-grade Polypropylene.
- RoHS complaint Nano-ceramic and carbon powder damping material.
- cable outer diameter: 14.0mm
- Length : 1.2M Approx.


FURUTECH

Origin Power NCF(R)

High Performance Power Cord



83,000.-

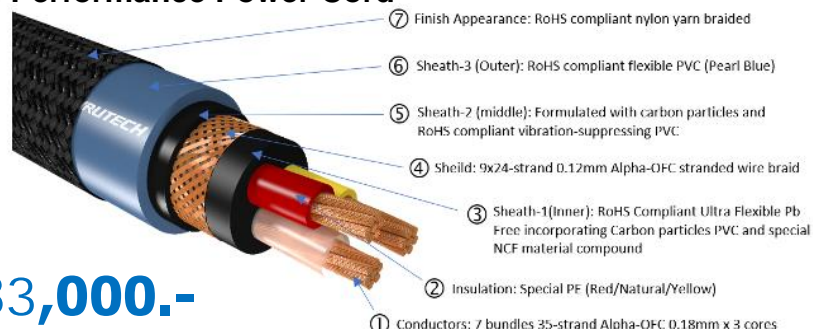

Origin Power NCF Cable Construction

***α (Alpha) Conductor Is Composed of Fine μ -OFC Wire Strands
Treated With Furutech's α (Alpha) Cryogenic and Demagnetizing Process***

Furutech's Pure Transmission and NCF material Build Quality

Furutech's Pure Transmission technology is designed with meticulous attention to every aspect of power and signal transfer, addressing common challenges such as contact resistance, EMI, and RFI rejection through optimized engineering solutions. By leveraging the finest materials and advanced processes, Furutech consistently delivers exceptional performance.

A cornerstone of this engineering is Furutech's unwavering commitment to build quality. The FI-28M NCF(R) / FI-28 NCF(R) models exemplify this ethos with rhodium-plated, non-magnetic pure copper conductors, Alpha μ -Conductors, precision wire clamps, triple-layered anti-resonance PVC sheaths, and the patented Ground/Earth Jumper system to dissipate magnetic interference effectively. Each conductor component undergoes Furutech's Alpha Process, which includes deep cryogenic treatment and demagnetization to maximize performance.

The inclusion of Furutech's groundbreaking "NCF" material in these connectors demonstrates the company's dedication to innovation. NCF is specially engineered to combat static electricity, delivering superior vibration damping and neutralizing unwanted electrostatic noise. The result? A cleaner, more accurate soundstage free of coloration, allowing the true essence of the audio source to shine through.

Furutech has always aimed to offer the highest quality audio equipment at accessible prices, and the Origin series is a testament to this philosophy. Representing true cost vs. performance, the Origin Power NCF (R) power cables incorporate Furutech's α (Alpha)

-OFC conductors, treated with an ultra-low temperature and electromagnetic field process. This ensures unmatched conductivity and signal purity, delivering immersive, lifelike audio experience tailored to meet the exacting standards of audiophiles and professional sound engineers.

With the Origin series, Furutech redefines the balance between premium performance and value, making high-quality audio more accessible than ever.

Amazing Features

- Beautifully engineered power cords featuring α (Alpha) μ -OFC Conductors
- Special polyethylene insulation withstands high voltage and heat for lower capacitance and better mechanical damping
- Patented Ground/Earth Jumper Technology (US Patent No.: 6,669,491)
- ★ Even during normal use, cables generate unwanted electromagnetic radiation, leading to potential disturbances. This radiation is most pronounced where the cable is bent or folded. Furutech's "Earth Jumper Function" addresses this by incorporating a copper plate that makes contact with the mounting screws, grounding and stabilizing the electromagnetic potential. By absorbing this unwanted electromagnetic radiation, the system effectively enhances sound quality and significantly reduces electromagnetic vibrations, resulting in a clearer and more stable audio performance.
- Featuring special design wire-clamping mechanism for firm contacts and pure, stable power transmission
- Unique construction offers the industry's firmest contacts
- Triple RoHS Compliant Ultra Flexible Pb free PVC Sheaths provide improved vibration isolation.
- Insulated with Polyethylene (PE) reducing capacitance.
- Results in greater resolution, clarity, powerful dynamics, and an ultra-quiet soundstage in which music develops more fully without artificial upper frequency "presence region"

Cable Specifications

1. Conductors: 7 bundles 35-strand α (Alpha) μ -OFC 0.18mm x 3 cores \approx 9AWG (6.22sq.mm)
2. Insulation: Polyethylene (red/natural/yellow) 5.5mm diameter approx
3. Sheath-1 (inner): RoHS-compliant vibration-suppressing PVC incorporating with special NCF material and carbon particles compound as an anti-static material (Black) 13.5mm diameter
4. Shield: 9 x 24 strands 0.12mm α (Alpha) μ -OFC conductor braided
5. Sheath-2 (middle): Formulated with carbon particles and RoHS compliant vibration-suppressing PVC (black)
6. Sheath 3: Outer sheath: RoHS compliant flexible PVC (Pearl Blue) 18.0mm diameter
7. Finish Appearance: RoHS compliant nylon yarn braided outer sleeve 19.0mm diameter approx



FURUTECH

Furutech's New Flagship Speaker Cable



675,000 2.5m/pair

Project-V1-S

FEATURES

Introducing the Furutech Project V1-S, the pinnacle of high-end audio grade speaker cables, meticulously crafted to elevate your audio system's performance to unprecedented heights. Engineered with the same precision and unwavering commitment to exceptional sound quality as the Project V1 power cord, Project V1-L interconnect cable and the Project V1-T tonearm cable and the Project V1-D digital cable, this speaker cable promises an extraordinary level of detail, transparency, and sonic accuracy in your music reproduction. At its core, the Project V1-S features Furutech's hybrid α (Alpha) silver-coated OCC inner conductor and α (Alpha) DUCC outer conductor, the same specialized copper used in the Project V1-L and Project V1. These conductors undergo a unique cryogenic and demagnetizing process, ensuring unparalleled conductivity and signal purity. The result is an immersive and lifelike audio performance that caters to dedicated audiophiles and professional sound engineers alike.

To further enhance audio quality and maintain pristine signal integrity, Furutech has incorporated their NCF (Nano Crystal2 Formula) technology into the construction of this interconnect cable. This advanced technology effectively eliminates any noise or interference, allowing you to experience unrivaled clarity, dynamics, and depth in your music.

Meticulously constructed using high-quality materials and engineering techniques, the Project V1-S features a multi-layered sheath consisting of high-grade insulation and a vibration-damping layer, akin to the tonearm cable. This construction prevents external interference, ensuring the highest quality audio transmission and minimizing signal degradation.

Furutech builds each and every cable in their line with optimized engineering solutions, advanced materials, and utterly meticulous build quality for the ultimate test. The Project V1-S series Speaker Cable achieves its remarkably quiet soundstage and transparent presentation with its hybrid α (Alpha) silver-coated OCC inner conductor, α (Alpha) DUCC outer conductor, three-layer shielding, one-layer sleeve, and double-layer filler. Additionally, a specially engineered cable damping ring improves grip and avoids potential distortion.

The Project V1-S series special connectors, including high-performance Spade & Banana connectors and Cable Damping rings, incorporate Furutech's special antistatic and antiresonance NCF material combined with high-grade nylon insulation. Connector conductors are formed with nonmagnetic rhodium coated α (Alpha) pure copper secured in bodies insulated with NCF. The housings of these special connectors and Damping Rings are formed with 4-layer hybrid NCF carbon fiber, finished with a special hardened clear damping coating.



Elevate your audio system to new heights with the Furutech Project V1-S and unleash the true potential of your music, achieving verisimilitude to the original event, a sense of engagement promoting suspension of disbelief, and an immersion in the audio experience. Engage effortlessly with meticulous preparation of the entire playback chain, especially including cables, and most importantly, at the signal source.

SPECIFICATIONS

- Multi-material Hybrid conductor with special 4 tier concentric design.
- Specially designed Sleeve.
- Sound enhancing, resonance damping, double sleeve, 3 shield design.
- Insulation : Audio-grade Polypropylene.
 - RoHS complaint Nano-ceramic and carbon powder damping material.
 - cable outer diameter: 26mm approx.
 - Length : 2.5 M approx.


FURUTECH

Filter

<p>Flow-28 Filter</p> <p>33,200.-</p>	<p>The Furutech Flow-28 Inline Power Filter</p> <ul style="list-style-type: none"> • The body of the Flow-28 combines two “active” materials: Nano-sized ceramic particles and powdered carbon plus Nylon and fiberglass to form an extremely effective mechanically and electrically damped body • Use between power cables and power distributors or power cables and components • Eliminates radiated AC noise • Fitted with rhodium-plated α (Alpha) nonmagnetic FI-28R connector • AC-1501R EMI-filtering IEC features rhodium-plated α (Alpha) nonmagnetic copper alloy conductors plus... • A parallel circuit with an in-line coil and capacitor that reduces noise at 100KHz by 8dB and at 500KHz by 14 dB and at 10MHz by more than 30dB • Floating Field Damper™ (Earth/Ground Jumper System) with US Patent No.: 6,669,491 • Patent-pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion • α (Alpha) conductor shield for protection against radiated noise • RoHS-compliant flexible PVC sheath improves vibration isolation • Special high-grade PE Insulation contributes to reduced capacitance • Incorporating Furutech's special passive GC-303 EMI filtering material 	
<p>Flow-08</p> <p>12,800.-</p>	<p>Flow-08 High Performance Inline EMI filter</p> <ul style="list-style-type: none"> • Fitted with 24k gold-plated α (Alpha) nonmagnetic Furutech model C7 IEC connector • Eliminates radiated AC noise • AC-1001G EMI-filtering IEC features gold-plated α (Alpha) nonmagnetic copper alloy conductors • A parallel circuit with an in-line coil and capacitor that reduces noise at 100KHz by 8dB and at 500KHz by 14 dB and at 10MHz by more than 30dB • Patent-pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion • α (Alpha) conductor shield for protection against radiated noise • RoHS-compliant flexible PVC sheath improves vibration isolation • Special high-grade flexible PVC Insulation contributes to reduced capacitance • Incorporating Furutech's special passive GC-303 EMI filtering material 	

FURUTECH

Filter

Filter		
<p>Flow-15Plus Filter</p> <p>17,300.-</p>	<p>The Furutech Flow-15 Inline Power Filter</p> <ul style="list-style-type: none"> • The body of the Flow-15 combines two “active” materials: Nano-sized ceramic particles and powdered carbon plus Nylon and fiberglass to form an extremely effective mechanically and electrically damped body • Use between power cables and power distributors or power cables and components • Eliminates radiated AC noise <p>Flow-15 Plus In-line EMI Filter AC 115V/250V 10A 50/60Hz Amazing Features</p> <ul style="list-style-type: none"> • The body of the Flow-15 Plus combines two “active” materials: Nano-sized ceramic particles and powdered carbon plus Nylon and fiberglass to form an extremely effective mechanically and electrically damped body • Use between power cables and power distributors or power cables and components • Eliminates radiated AC noise • Fitted with 24k gold-plated α (Alpha) nonmagnetic FI-15 Plus(G) connector • AC-1001G EMI-filtering IEC features rhodium-plated α (Alpha) nonmagnetic copper alloy conductors • A parallel circuit with an in-line coil and capacitor that reduces noise at 100KHz by 8dB and at 500KHz by 14 dB and at 10MHz by more than 30dB • Floating Field Damper™ (Earth/Ground Jumper System) with US Patent No.: 6,669,491 • Patent-pending metal cable clamp improves grip and reduces mechanically and electrically induced distortion • α (Alpha) conductor shield for protection against radiated noise • RoHS-compliant flexible PVC sheath improves vibration isolation • Special high-grade PE Insulation contributes to reduced capacitance • Incorporating Furutech’s special passive GC-303 EMI filtering material <p>The AC-1001G EMI Filtering IEC Input The parallel circuit with in-line coil and capacitor reduces noise at 100 KHz by 8dB and at 500 KHz by 14dB and at 10MHz by more than 30dB</p> <ul style="list-style-type: none"> • 24k gold- plated α (Alpha) nonmagnetic copper alloy conductors • Outer cover • Chrome-plated steel-plate • Inner cover • Nylon fiberglass • Inner Box • Nylon fiberglass • Inner parts held in place with Piezo Epoxy • Rating • AC 115V/250V 10A 50/60Hz 	

FURUTECH

Filter



Flow-C15 Filter (G)

18,900.-





Flow-C15 Filter (G)
The AC-1501 (G) EMI Filtering IEC Input

The parallel circuit with in-line coil and capacitor reduces noise at 100 KHz by 8dB and at 500 KHz by 14dB and at 10MHz by more than 30dB



Other Models



AC Power Can Make or Break Your System!

The audio you hear from your home entertainment system is essentially the incoming electricity itself, and the typically violent storms riding the AC line, and its ground are very detrimental to the performance of your components.

The Flow-C15 Filter (G) is a superbly engineered and finished inline power filtering unit that eliminates many common problems caused by contaminated electrical power lines. It protects against distortion caused by ground noise, voltage spikes and sags, high frequency power supply noise from other components in your own system, and finally high-frequency digital noise emanating from processors and digital interconnects. Plus, you're never alone when you take your listening seat; the residential AC supply is shared with other apartments, homes, and businesses on the same utility transformer explaining why many enthusiasts find their systems perform to a higher standard late at night and over weekends.

And while the Flow-C15 Filter (G) is a star performer at eliminating common AC problems, it does it all without restricting current draw in any way.

Furutech, known for its world-class Pure Transmission engineering, build and finish, have done the tests and the Flow-C15 Filter (G) does not interfere with current draw. The AC-1501 (G) EMI-filtering IEC input perfectly complements the remarkably effective Flow-C15's ability to eliminate distortion. The IEC connector used is the Furutech audio grade FI-C15 (G). The body is made of a special nylon resin with vibration damping properties. The electrodes are made of gold-plated pure copper with excellent conductive properties and treated with Furutech's α -process.

The Flow-C15 Inline AC Filter lowers noise on every component on which it's used resulting in very natural and extremely fine resolution down and through the utterly silent noise floor. It improves sound staging and imaging while creating nuanced high frequencies, an attractive, engaging midrange, tight and controlled bass, with power and dynamics to spare.


Amazing Features

- The body of the Flow-C15 Filter (G) combines two "active" materials: Nano-sized ceramic particles and powdered carbon plus Nylon and fiberglass to form an extremely effective mechanically and electrically damped body
- Use between power cables and power distributors or power cables and components
- Eliminates radiated AC noise
- Fitted with 24k gold-plated α (Alpha) nonmagnetic FI-C15 (G) connector
- AC-1501 (G) EMI-filtering IEC features 24k gold-plated α (Alpha) nonmagnetic copper alloy conductors.
- α (Alpha) conductor shield for protection against radiated noise
- RoHS-compliant flexible PVC sheath improves vibration isolation
- Special high-grade PE Insulation contributes to reduced capacitance
- 24k gold-plated α (Alpha) nonmagnetic copper alloy conductors
- Outer cover • Ni-plated steel-plate
- Inner Box and cover • PBT (Poly Butylene Terephthalate)
- Rating: AC 125V 15A / AC 250V 10A 50/60Hz

The Flow-C15 complies with IEC standards and features the EMI filter AC-1501 G (UL E134751 /

CSA Certificate Number: 1224486) and the IEC connector FI-C15 (G) (PSE Certificate Number: JET7873-

43004-1001 / KEMA-KEUR Certificate Number: 35-104104 REV.1), both of which meet IEC regulations.

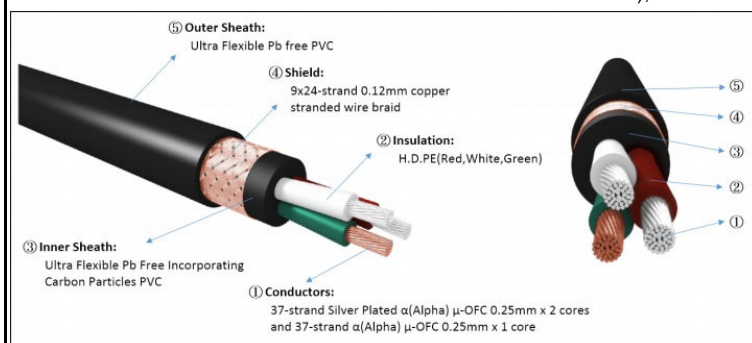

Cable Specifications

- Conductors • 37-strand Silver Plated α (Alpha) μ -OFC 0.25mm x 2 cores and 37-strand α (Alpha) μ -OFC 0.25mm x 1 cores
- Insulation • High-density P.E. (Red, White, Green) 3.43mm diameter
- Inner Sheath • RoHS-compliant flexible PVC incorporating carbon particles
- Shield • 0.12mm diameter α (Alpha) Conductor wire braid
- Sheath • RoHS-compliant flexible PVC, 12.9mm diameter approx.